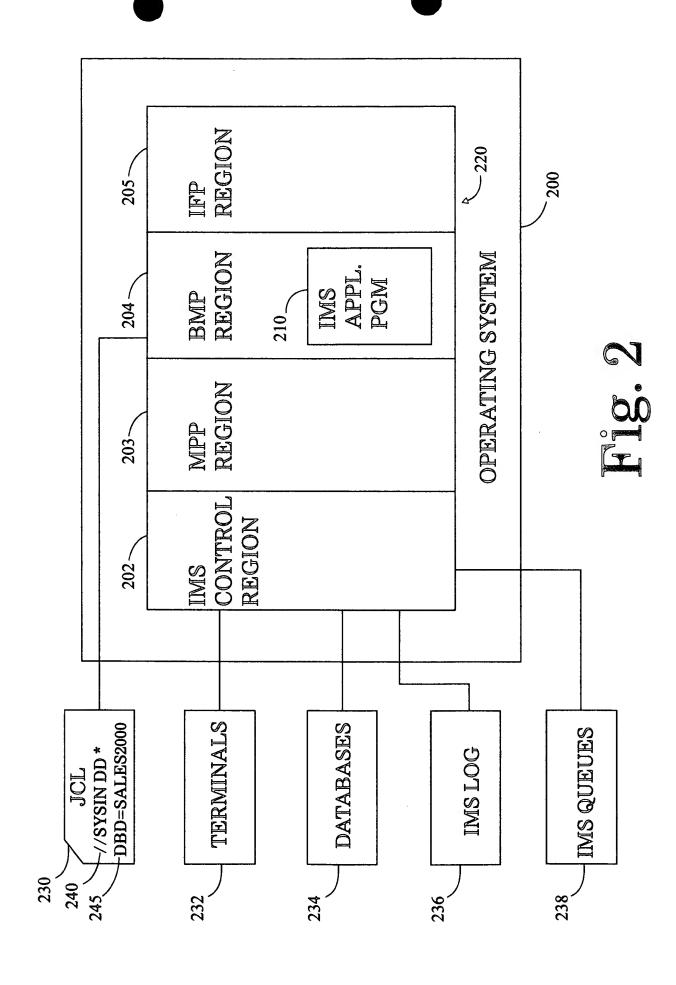
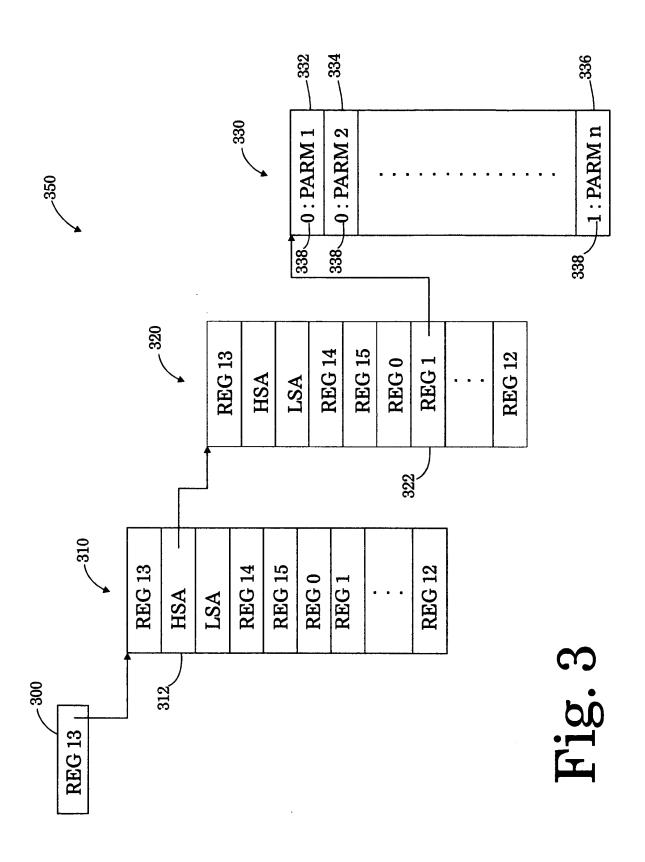
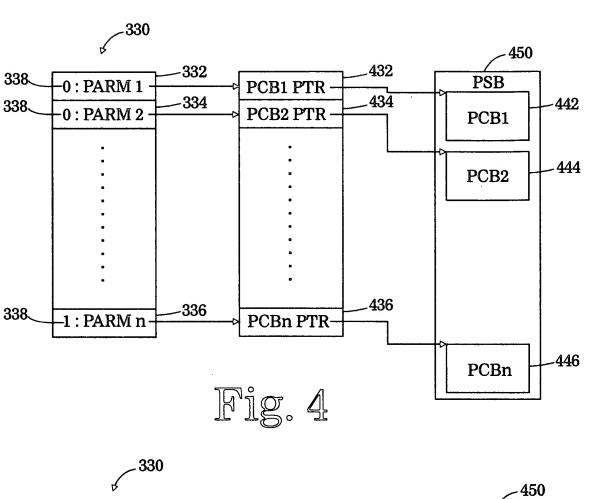
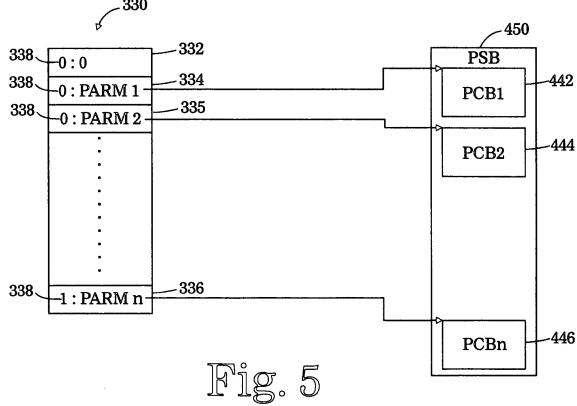


Fig. 1









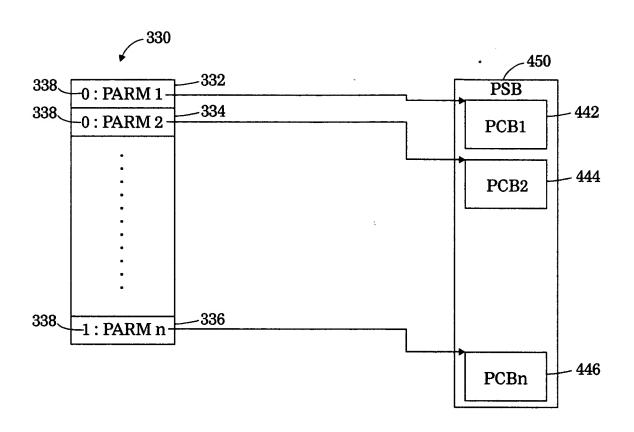


Fig. 6

__ 550

DCL DBPTR POINTER; DCL 1 DBPCB BASED(DBPTR),


⁵⁰² —2 NAME	CHAR(8),
2 SEGLEVEL	CHAR(2),
2 STAT	CHAR(2),
2 PROCOPT	CHAR(4),
2 RESERV	BIN(31),
2 SEGNAME	CHAR(8),
2 KFB_LEN	BIN(31),
2 SENSEG	BIN(31),
2 KEYFBA	CHAR(255);

Fig. 7

DCL IOPTR POINTER; DCL 1 IOPCB BASED(IOPTR),

⁵⁵²—2 NAME **CHAR(8)**, BIN(15), 2 RESV CHAR(2), 2 STAT CHAR(8), 2 LDTE 2 PREFIX BIN(31), CHAR(8), 2 MODN -2 USER CHAR(8), 2 SENSEG BIN(31), CHAR(8); 2 GROUP

Fig. 8

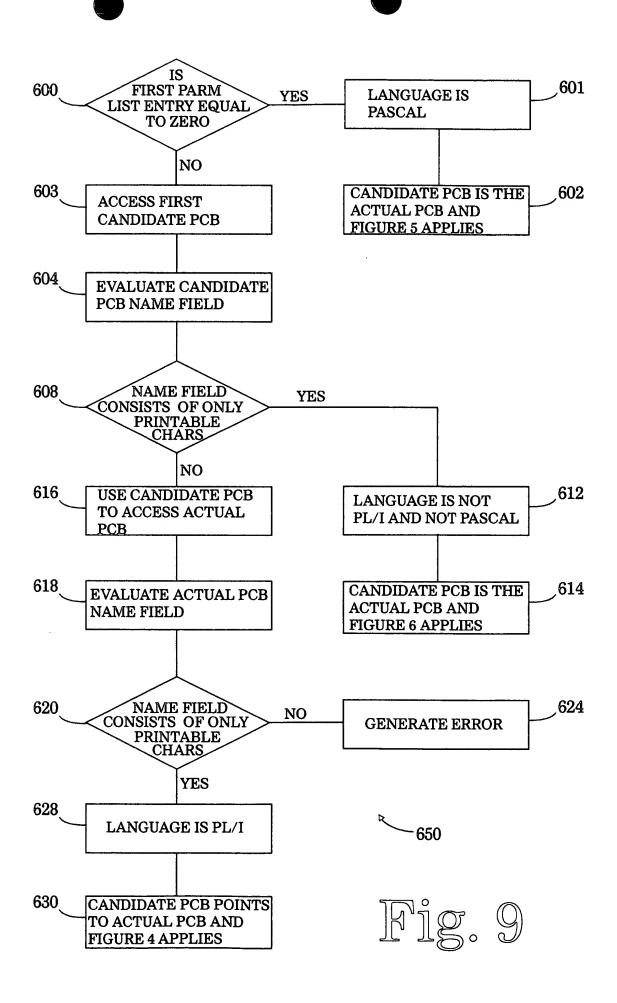

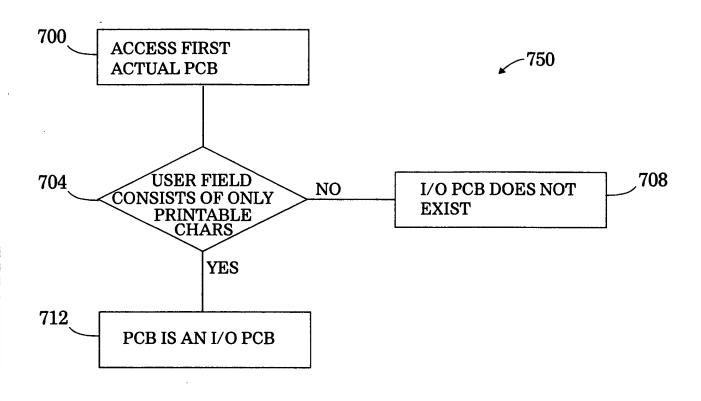


Fig. 10

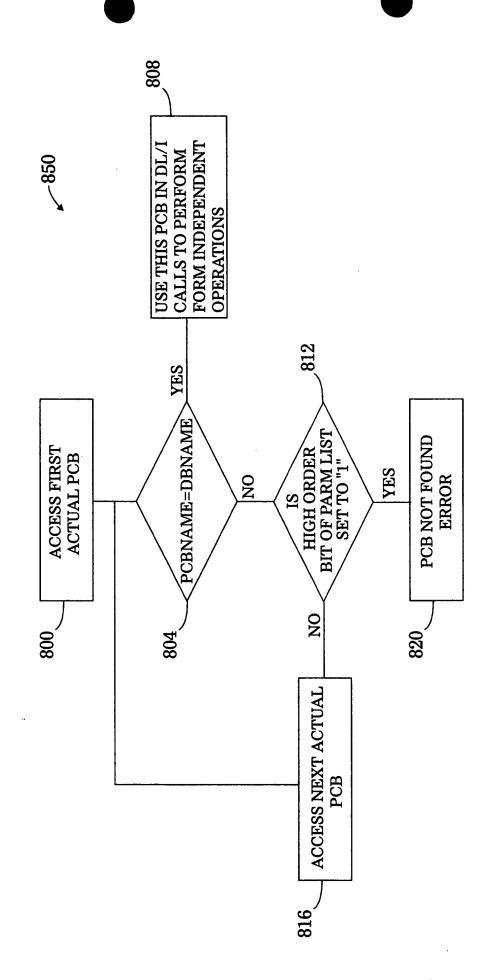


Fig. 11